SIEMENS



OP320C

AlgoRex Synova™

Optical smoke detector

CE

For conventional detector line SynoLINE300

- Patented technology: 10x more resistant to dust and dirt than average
- Unique product: 3 patents on the optical chamber
- Transzorb: Above average lightning protection
- Immune to electromagnetic interference from mobile telephones, fluorescent lights and most other sources
- Exceeds national and international standards and passes the toughest internal tests
- Click concept: Plug-in connections for detector installation and line connection
- Siemens special: Each detector housing can be colored
- Uncompromising use of environmentally-compatible materials

The Optical detector OP320C has an excellent good all-round performance within the Synova 300 range. It has a completely new optical chamber and the latest electronics which opens up new dimensions in safety and functionality.

New optical system

The OP320C has a completely new patented optical system. An excellent signal / noise ratio is achieved by precise beam guidance. The asymmetrical, highly polished labyrinth enables a level of light absorption greater than ever before. Dust and dirt in the optical chamber are hardly illuminated and therefore largely ignored. The design of the futuristic-looking grid is such that it is almost impossible for the receiver to even see the areas most likely to be contaminated. The immunity from electromagnetic interference is at least 5x better than the present standards.

Application

The Optical detector OP320C is an excellent all-round detector. It is particularly suitable anywhere where there are normal environmental conditions.

• The Synova 300 range offers the following

- Products for every application
- Maximum flexibility, all types of detector mounted on the same type of base
- Fast, easy installation due to simple click concept


Design

- SO320 detector base mounted whilst running cables contains only the screw less click-in connector
- Click concept:
 - Plug-in connector for wiring (line connection)
 - Plug-in mounting for detector
- Up to two external response indicators type Al320/Al322 can be connected to each detector

Options


- CDM320 commissioning module: plug-in to check the pre-wired detector lines and base
- SOA322 base attachment for surface mounting
- Anti-theft device: TP320 detector cover locking device

Functional features of patented optical chamber

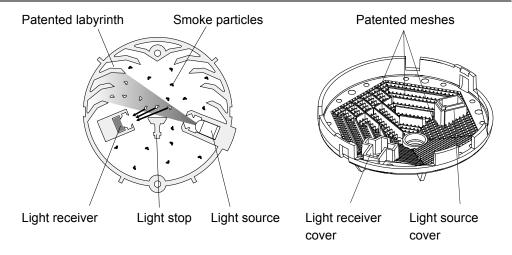


Dimensions

OP320C with SO320



Accessories

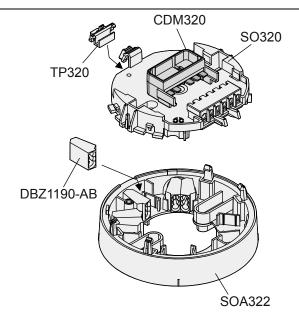

Technical data

E	0786	ì

Siemens Schweiz AG, CH-6301 Zug Date: see manufacuring date on the product 0786-CPD-20165

EN54-7 Point smoke detector; Safety in case of fire OP320C Technical data see doc. 1704

Operating voltage	DC 16 28 V
Operating current no smoke	max. 100 μA
with smoke	max. 170 μA
Current consumption in alarm	40 mA
status	
Response sensitivity	2.5 %/m
Operating temperature	-10 +55 °C
Storage temperature	-20 +65 °C
Humidity (no condensation)	≤95 % rel.
Protection category	IP44
Color	white, ~RAL 9010
Standards	EN54-7
Approvals	
- VdS	G298039
_ LPCB	531c/04
System compatibility	Compatible with all fire detection panels which sup-
	port the SynoLINE300 specifications.
	A list of compatible equipment is available from your
	local sales organization.
QS Standards	Industry-specific, certified quality assurance system in
	accordance with EN ISO 9001:2000.

Details for ordering

Туре	Part no.	Designation	Weight
OP320C	BPZ:5081460001	Optical smoke detector	0.060 kg
SO320	BPZ:5085990001	Base for Synova 300 series detectors	0.020 kg
SOA322	BPZ:5358340001	Base adapter for surface mounting	0.020 kg
DBZ1190-AB	BPZ:4942340001	Connecting terminal	0.001 kg
CDM320	BPZ:5162350001	Commissioning unit	0.010 kg
TP320	BPZ:5093100001	Detector cover locking device	0.005 kg
AI91C	S54370-F7-A1	Alarm indicator for frame mounting	0.030 kg
Al92C	S54370-F8-A1	Alarm indicator for surface mounting	0.050 kg
Al330	BPZ:3169430001	Additional frame	0.020 kg
	OP320C SO320 SOA322 DBZ1190-AB CDM320 TP320 Al91C Al92C	OP320C BPZ:5081460001 SO320 BPZ:5085990001 SOA322 BPZ:5358340001 DBZ1190-AB BPZ:4942340001 CDM320 BPZ:5162350001 TP320 BPZ:5093100001 Al91C S54370-F7-A1 Al92C S54370-F8-A1	OP320C BPZ:5081460001 Optical smoke detector SO320 BPZ:5085990001 Base for Synova 300 series detectors SOA322 BPZ:5358340001 Base adapter for surface mounting DBZ1190-AB BPZ:4942340001 Connecting terminal CDM320 BPZ:5162350001 Commissioning unit TP320 BPZ:5093100001 Detector cover locking device Al91C S54370-F7-A1 Alarm indicator for frame mounting Al92C S54370-F8-A1 Alarm indicator for surface mounting

Siemens Switzerland Ltd Industry Sector
Building Technologies Division International Headquarters Fire Safety & Security Products Gubelstrasse 22 CH-6301 Zug Tel. +41 41 724 24 24 www.siemens.com/buildingtechnologies

© 2010 Copyright by Siemens Switzerland Ltd Data and design subject to change without notice. Supply subject to availability.