



LED Beacon SOLISTA LX Ceiling




The Solista LX Ceiling has a unique lens design that distributes the light in a cylindrical shape, to achieve the required illumination specified by EN 54-23. Designed for installation at a height of up to 3m and with a discrete appearance, the device is ideal for a variety of applications.

- Ultra low current consumption
- Up to 7.5m coverage volume
- 0.5Hz or 1Hz Flash rate
- Coverage switch to 3m

Benefits

- Use where current consumption is a key consideration
- Ideal for bedrooms, bathrooms and toilets
- Switch flash rate to 0.5Hz to reduce current consumption
- Reduces power consumption by up to 50%

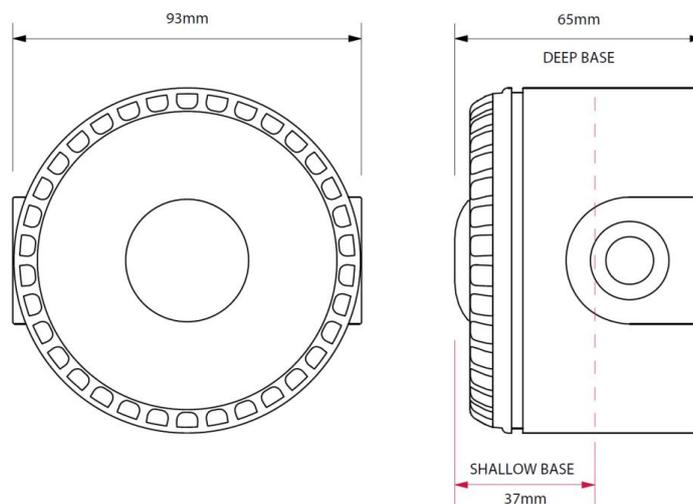

■ Technical Specifications

Mounting Type	Ceiling
Voltage	9 – 60V _{DC}
Current	10 – 25mA dependent on setting
Coverage (y)	7.5m (Switchable to 3m)
Mounting Height (x)	3m (max)
Coverage Volume Code	C-3-7.5
Coverage Volume	132m ³ (21m ³)
Flash Rate	1Hz (Switchable to 0.5Hz)
Operating Temperature	-25°C ... +70°C
Monitoring	Reverse Polarity
Protection	IP33C Shallow Base and IP65 Deep Base
Weight	100g

■ Ordering Information

Type	Art.-No.	Description	Weight
SOLISTA-LX-C-R	S54539-Z284-A100	Beacon, ceiling, red	100g
SOLISTA-LX-C-W	S54539-Z284-A200	Beacon, ceiling, white	100g

The information in this document includes general descriptions of the technical possibilities, which need not be installed in each individual case. The desired performance characteristics must therefore be specified for the individual case when the contract is concluded.

© Siemens Building Technologies • Edition: 15.04.2014

Global Security Products from Siemens
 Siemens AB
 Infrastructure & Cities Sector
 Building Technologies Division
 Security Products
 Englundavägen 7
 Box 1275
 17124 Solna
 Sweden
 Tel: +46 8 629 0300
 Fax: +46 8 627 0096
www.siemens.com/securityproducts