




Magnetic Contacts


MK-2400-S1 / MK-2400-S2

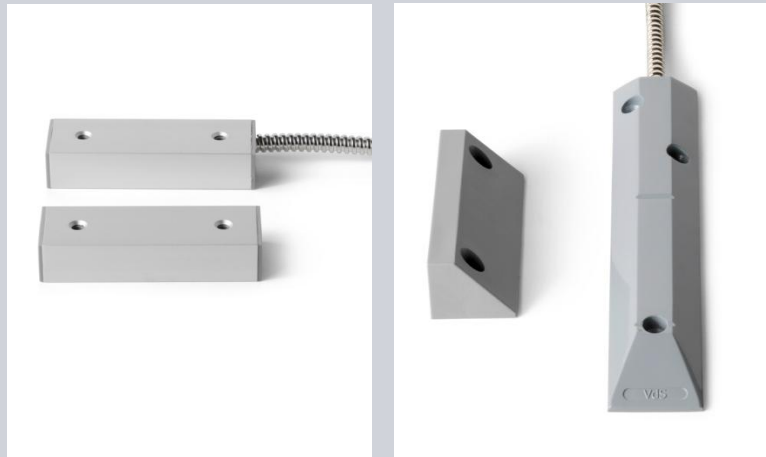


The new EN50131-2-6 approved magnetic contacts MK-2400-S1 and MK-2400-S2 have been especially designed for outdoor applications.

- Robust housing made of Aluminum and polyamide
- Metal tube for cable protection
- Protection category IP67
- Good long-term stability
- Convenient mounting

MK-2400-S1

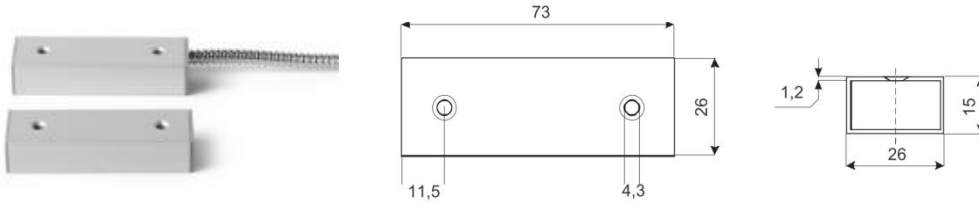

MK-2400-S2

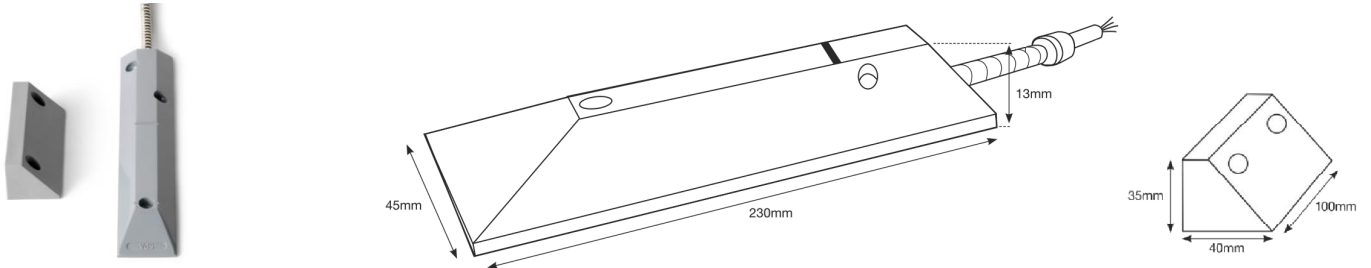

■ Technical data

Line contact	Single-pole NC contact
Operating voltage	≤ 40 V DC
Contact capacity	≤ 6 W
Switching voltage	≤ 100 V DC
Switching current	≤ 500 mA
Transition resistance	≤ 0.15 Ohm
Temperature range	-40 °C to +70 °C
Housing protection	IP67
Environmental class VdS / EN	III / IIIA
Approvals (pending)	VdS, EN, SBSC

■ Ordering Informations

Type	Order No.	Description	Weight
MK-2400-S1	S54536-F104-A100	Magnetic contact S1, 6 m cable, 1 m metal tube	0.216 kg
MK-2400-S2	S54536-F104-A200	Magnetic contact S2, 6 m cable, 0.5 m metal tube	0.44 kg

The information in this document includes general descriptions of the technical possibilities, which need not be installed in each individual case. The desired performance characteristics must therefore be specified for the individual case when the contract is concluded.

© Siemens Building Technologies • Dokument Nr. A6V10427382 • Ausgabe: 13.02.2014 • Dokumentversion: 1.0